





GENERAL CHARACTERISTICS:

- * Fabricated body and base for optimum rigidity
- * Flat-bottomed base for easy removal of filing folders
- * Two welded jack supports with 4 adjusters
- * Shelves with attachments for suspended files adjustable by 50-mm sections
- * Shelves in the same colour as the cabinet body
- * ABS handles (metal mechanism)
- * Interchangeable cylinder lock: 2-point locking system on tall and small cabinets
- * Suspended file support underneath the top (non-removable)
- * 430 mm depth
- * Uniformity within the different dimensions

CABINETS COMPLIANT WITH EUROPEAN STANDARDS NF EN 14073-2 and 3 / NF EN 14074 and with FRENCH STANDARD NF D 62-041

Office furniture Comfort & Safety NF certification and GS certification & NF ENVIRONNEMENT

DETAILED TECHNICAL CHARACTERISTICS

FRAMEWORK: 0.8-mm thick cold-rolled sheet metal.

The appearance and dimensions are obtained using a **special**

system for planishing and multiplexing sheet metal.

The sheet metal **comes directly from the main forges in Europe**. This means we can guarantee the characteristics detailed in the

specifications.

The entire framework is welded. Strength welded on a fully automated welding line equipped with continual electronic

control.

Rounded metal edges (absence of sharp angles).

FINISH: Tunnel-tempered and phosphatised.

EPOXY powder paint, no release of solvents

TOP: Powder paint coated plate standard on all models.

DOORS: 0.8-mm folded plate with welded omega-shaped reinforced

frame.

Doors fitted on welded hinges, opening to 180°.

EPOXY paint.

HANDLE - LOCKBlack ABS handle (steel and Zamak hardware), diameter: 92 mm.

Rotating **2 point locking system** by linkage for cabinets (height:

198 cm and 100 cm).

Lock fitted with a numbered interchangeable cylinder and 2

numbered keys in nickel-plated steel.

1





FIRE LOAD

198 x 120 cabinet, empty: 35MJ 198 x 100 cabinet, empty: 29MJ

100 x 120 cabinet, empty: 22MJ 100 x 100 cabinet, empty: 22MJ

120 shelf: 2.5MJ 100 shelf: 2.2 MJ

COLOUR CHART



Beige RAL 1015



Light grey RAL 7035




Dark grey RAL 7016



Black RAL 9005




HORIZONTAL PLANES OF SWING-TYPE DOOR CABINETS DEPTH 430

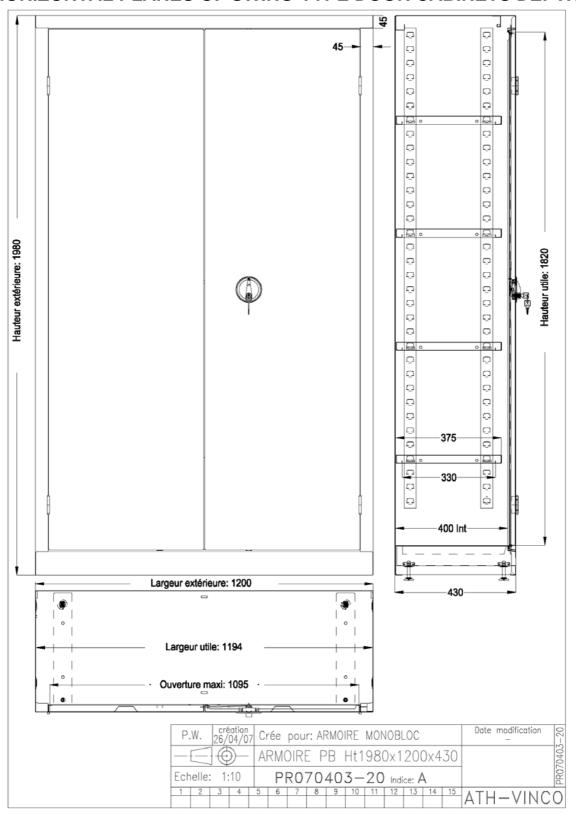



HORIZONTAL PLANES OF FOLDING DOOR CABINETS DEPTH 430

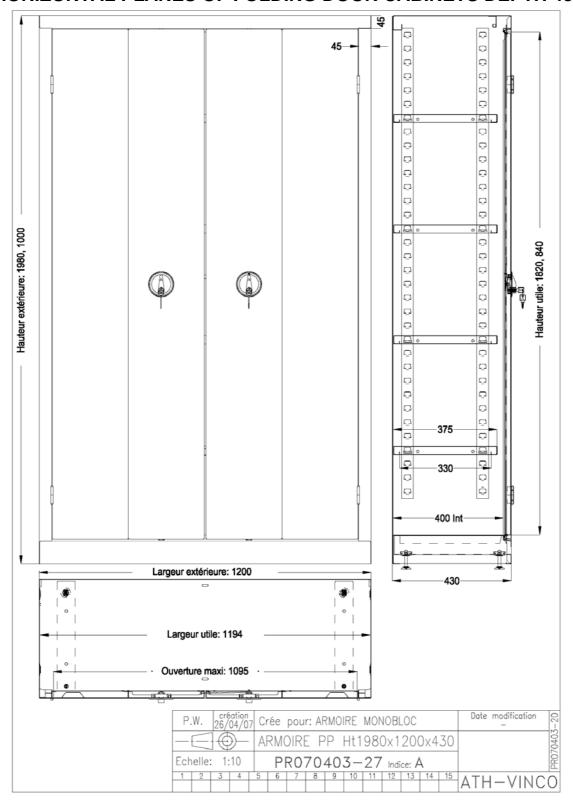




CABINET B.O.M. and DIMENSIONS, DEPTH. 430 mm (ID: 375 mm)

SWING-TYPE DOORS:

	Height 1,980 mm	Height 1,000 mm	
DEPTH 430			
Width 1200			
•	Inside dimensions: Height 1820 Width 1194	Inside dimensions: Height 840 Width 1194	
Width 1000 mm			
•	Inside dimensions: Height 1820 Width 994	Inside dimensions: Height 840 Width 994	

FOLDING DOORS:

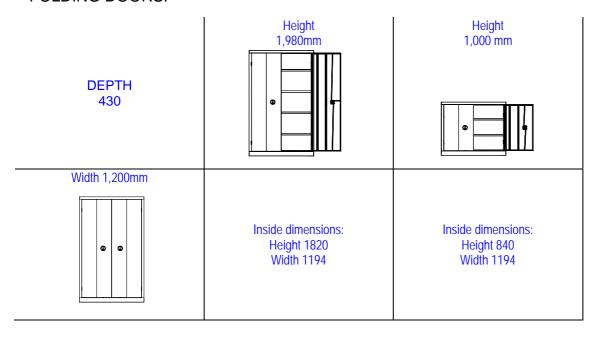



SHELVES


Shelves made of 0.8-mm sheet metal and profiled for fitting of suspended files (centre-line 330 mm).

Held in place by a rack of lugs.

Shelves can be adjusted by 50-mm sections.

The shelves in the 1200 cabinet can bear a **load of 120 kg** (65 kg on top + 55 kg underneath) and are **certified compliant with NF/GS standards**. Compliance with NF/GS standards of our cabinets is only certified if these shelves are used.

The shelves come in the same colour as the cabinet body.

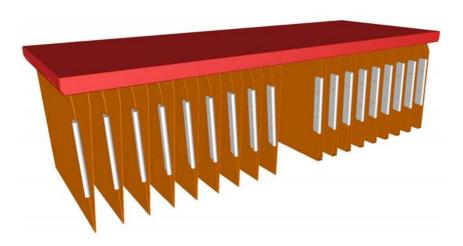

Dimensions

Cabinet	width 1200	1000	1200
Shelf length	1194	994	1194
Depth	375	375	552
Thickness	30	30	30

Capacity per shelf


1200	1000
+/-110	+/-90
+/-70	+/-55
14	12
7	9
15	13
	+/-110 +/-70 14 7

Capacity per cabinet

oapacity per cabinet							
	Suspen	Suspended files		Binder / Archive box			
	Number of shelves required	Number of filing rows	Number of shelves supplied as standard	Number of filing rows			
Cabinet, height 1980	5	6	4	5			
Cabinet, height 1000	2	3	2	2			



LAYOUT CAPACITIES

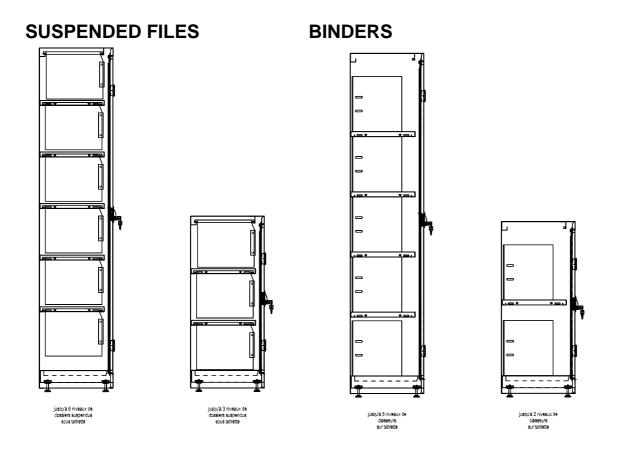



SELF-CONTAINED CABINET WITH SWING-TYPE DOORS





SELF-CONTAINED CABINET WITH SWING-TYPE DOORS

NF safety & comfort certification





SELF-CONTAINED CABINET WITH SWING-TYPE DOORS

GS CERTIFICATION





SELF-CONTAINED CABINET WITH FOLDING DOORS





SELF-CONTAINED CABINET WITH FOLDING DOORS

NF safety & comfort certification





SELF-CONTAINED CABINET WITH FOLDING DOORS

GS CERTIFICATION





NF ENVIRONNEMENT CERTIFICATION



Certificat de Qualité Quality Certificate

NF Environnement Ameublement

TEA afrece la configentió des gradure distinte al assesse, en diferente. El basenamente, A southerment et dere los configences prisons per los régles généra es de la Marque RF. En versi du présent certifices del central parties de la configence de la Marque RF. En versión que la prisonal de la configence de la Marque RF. En versión que la prisonal de la configence de la Marque RF. En versión que la prisonal de la configence del configence de la configence de la configence del configence de la configence del configence de la configence del configue producto del con

Les Ateliers d'Herqueville - VINCO Industries Titulaire Company name :

Parc de la Houssette - BP 20 27430 Herquey He

Usine France, Herqueville (27) Factory : Gamme

Armoire de Bureau métallique à portes battantes et pliantes

Amoire Mono 06 à portes baltantes / office filing cabinet Mono 06 with swinging doors Amoire Mono 06 à portes pliantes / office filing cabinet Mono 06 with folding doors

En das de contestación, seu le certificat en langue française fait foi, in caso of dispute, only the franch version of this contificate is the authorite foxe.



Caractér stiques pertifiées Certified characteristics

- Carantie de la qualite et de la durabilité du mobilier (solidité, durabilité, sécunité, confirmaté aux montes, ...);
- Limitation recompats son have recommend tent an beginn each de see (imperent de l'éverge de transformation bée aux matérials), absence de métal x loures cans les produits de notion, marquage pour faciliter le recyclage).
- NF environment certified products reduce impact on the environment and offer suitable fitness for use compared with other similar products or on the marriet;
- Criticile are based on file cycle approach, from the ran materials used in production process to the emil of life of the finished product.

Annule et remplace le certificat nº AMB 000173

NOTA : sents expoduits entompagnés dure econorte nu livres saes un discurrent falsant rétérence à la marque NT pausein, les debraion du présent cent l'eut. Nota : Only productive vitra a label or sepatible d'ille a decument referring in the IUT cent les presented of this certificate.



10, avenue de Saint-Mandé 75012 Paris Tél.: +33 (0)1 40 19 49 19 Fax: +33 (0)1 43 40 B5 65

www.fcba.fr

